



EN161

HERBERHOLZ
INDUSTRIAL VALVES

BUTTERFLY VALVE

SMART SECURE
XL EDITION



DN
500 - 1200



Temperature
max. 120°C




Pressure
max. 2 Bar



Steel Industry



Industrial Combustion
Technology

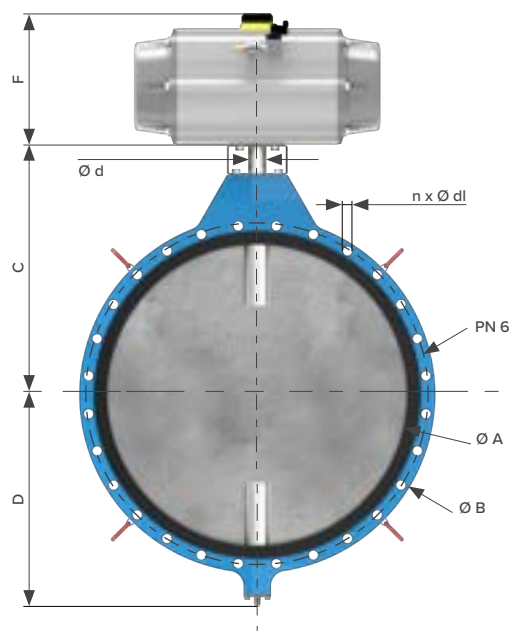


SHAFT
1.4057

SHAFT SEAL
Polyacetalresin-/PTFE-socket
with inner & outer
NBR / FPM-O-rings

SEAL RING
NBR-DVGW,
FPM vulcanized

DISC
1.4571, 1.0570, 1.4462
Compo Coat CCR32

BODY
1.0570 with
epoxy resin-coating

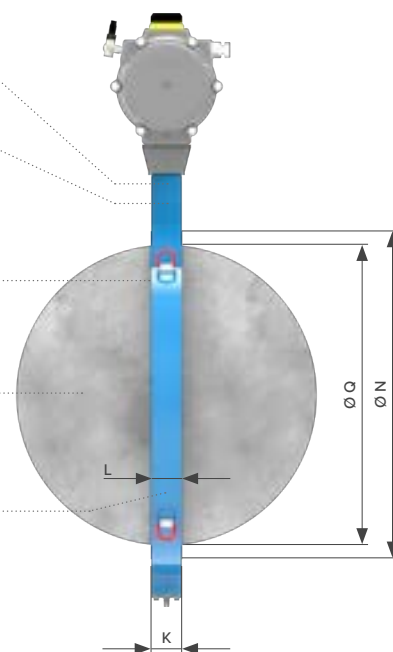

DN	Actuator Type	Ø A	Ø B	C	D	F	K	PN 6	n x Ø dl	Ø N	Q	Ø d	Weight [kg] (incl. Actuator)
500	SC 1200	490	645	495	428	295	90	600	20 x Ø 22	570	487	50	188
	SC 2000					349							212
600	SC 2000	590	755	545	477	349	90	705	20 x Ø 26	670	587	50	213
	SC 3000					380							245
700	SC 2000	690	860	595	528	349	90	810	24 x Ø 26	765	687	50	241
	SC 3000					380							273
800	SC 2000	790	975	645	578	349	90	920	24 x Ø 30	880	787	50	270
	SC 3000					380							302
900	SC 3000	890	1075	775	653	380	100	1020	24 x Ø 30	980	886	60	408
	SC 4000					433							458
1000	SC 3000	990	1175	825	703	380	100	1120	28 x Ø 30	1080	986	60	440
	SC 4000					433							490
1200	SC 3000	1190	1405	925	805	380	100	1340	32 x Ø 33	1295	1186	60	537
	SC 4000					433							587